





SPECIFICATIONS

23-28XL | TRUCK/TRACTOR TOWED SCRAPER

SCRAPER BOWL		
ISO Capacity	24.4 yd ^s	18.65 m ³
ISO Capacity - Sideracks	28.3 yd ^a	21.64 m ^s
Width of Cut, To Router Bits	135 in	3,429 mm
Capacity Struck	12.5 yd ^a	9.56 m ^a
Capacity Struck - Sideracks	17.4 yd ³	13.30 m ³
Max Depth of Cut	7.8 in	198 mm
Ground Clearance @ CE	24.4 in	620 mm
Apron Opening	69 in	1,753 mm

HYDRAULICS		
Bowl Cylinder Bore	8 in	203 mm
Bowl Cylinder Stroke	18 in	457 mm
Apron Cylinder Bore	4.5 in	114 mm
Apron Cylinder Stroke	25.1 in	638 mm
Ejector Cylinder Bore	6 in	152 mm
Ejector Cylinder Stroke	76 in	1930 mm

BRAKES & TIRES	
Brake Type	Dry Disk
Caliper Quantity	2
Tire Quantity	2
Standard Tires	37.25R35

GROUND PRESSURE*

23.1	
8.5	

WEIGHT DISTRIBUTION


Distribution Empty (Tongue)	30%
Distribution Empty (Axle)	70%
Distribution Loaded (Tongue)	32%
Distribution Loaded (Axle)	68%


DIMENSIONS

	DIIVIENSIONS		
	Width (Inside of Bowl)	132 in	3,353 mm
4	Width (Outside Rear Tires)	133 in	3,378 mm
2	Width (Outside Bowl)	145 in	3,683 mm
	Height (Floor to top of Ejector)	72 in	1,829 mm
	Height (Sidewall)	36 in	914 mm
	Length (Floor)	72 in	1,829 mm
5	Push Block to Axle	93 in	2,362 mm
6	Axle to Cutting Edge	171 in	4,343 mm
7	Cutting Edge to Hitch	218 in	5,537 mm
	Maximum Load Rating	75,000 lbs	34,020 kg

SHIPPING MODIFICATIONS

1	Height (Overall Shipping)	153 in	3,886 mm
2	Width (Overall Shipping)	147 in	3,734 mm
3	Length (Overall Shipping)	498 in	12,649 mm
	Empty Weight	42,000 lbs	19,050 kg

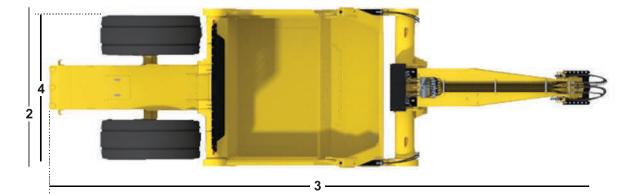

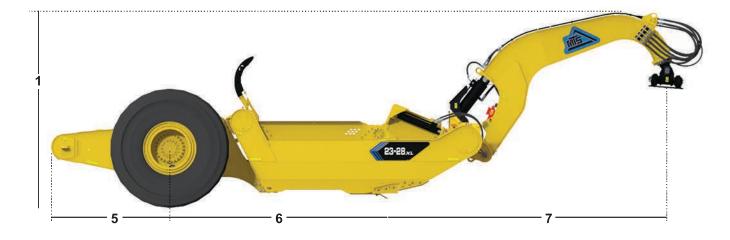

f 💿 🗘 🗇 🖸 ն 🖉