
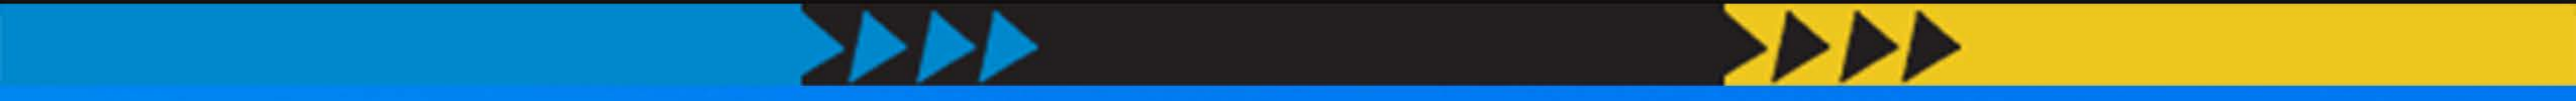


# 33-38LGP

TRACTOR/TRUCK TOWED SCRAPER

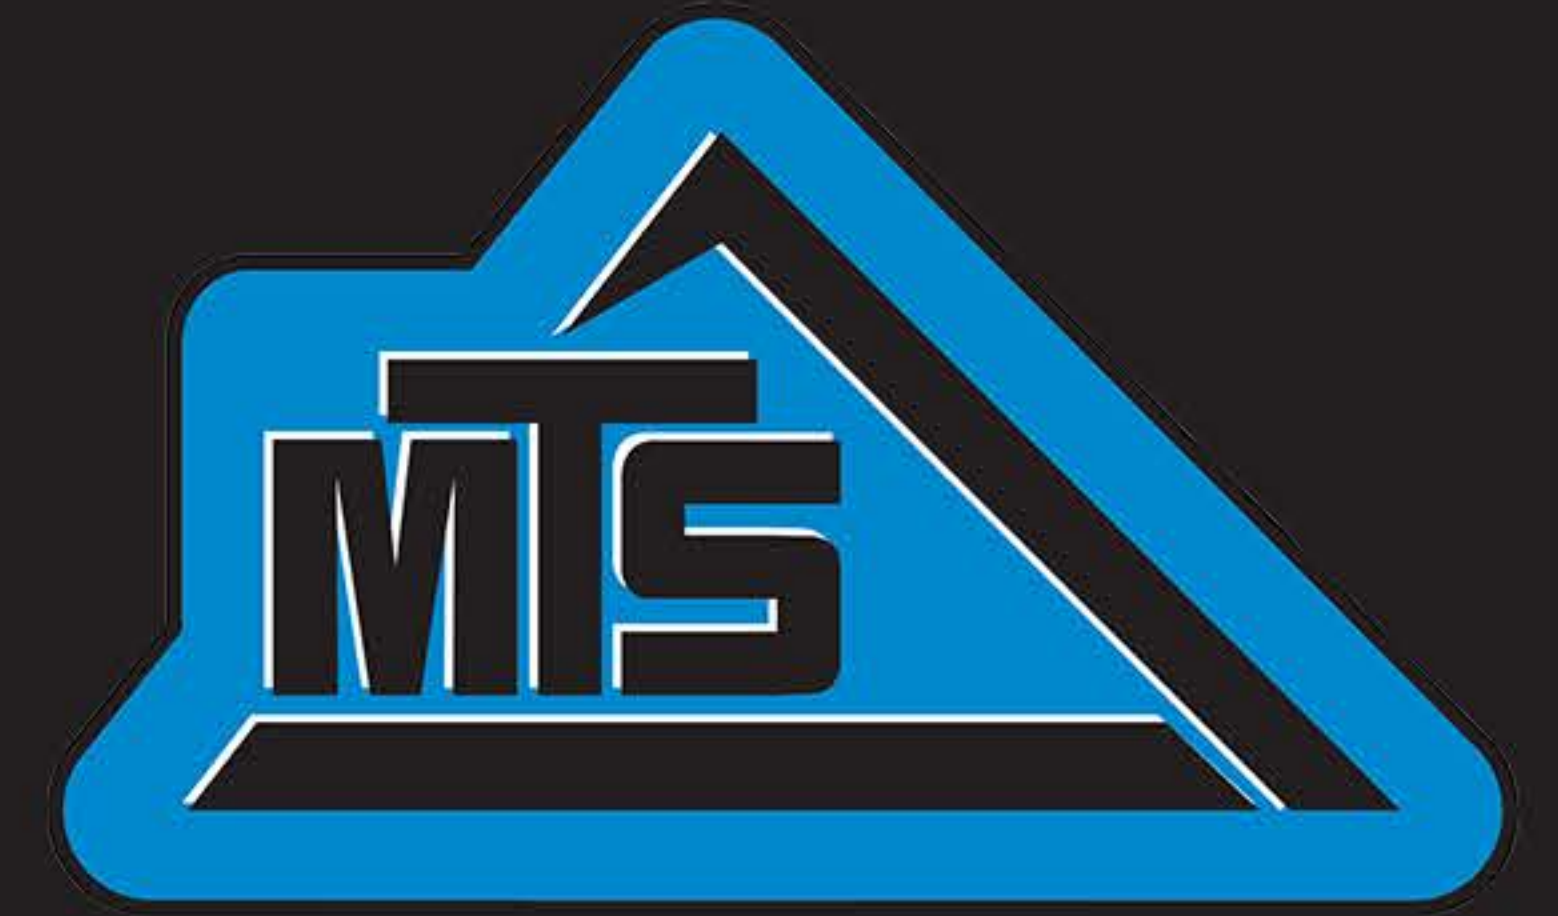

## MOBILE TRACK SOLUTIONS


TRACK FORWARD

*Our People. Our Products. Our Passion.*



[mobiletracksolutions.com](http://mobiletracksolutions.com)

# SPECIFICATIONS

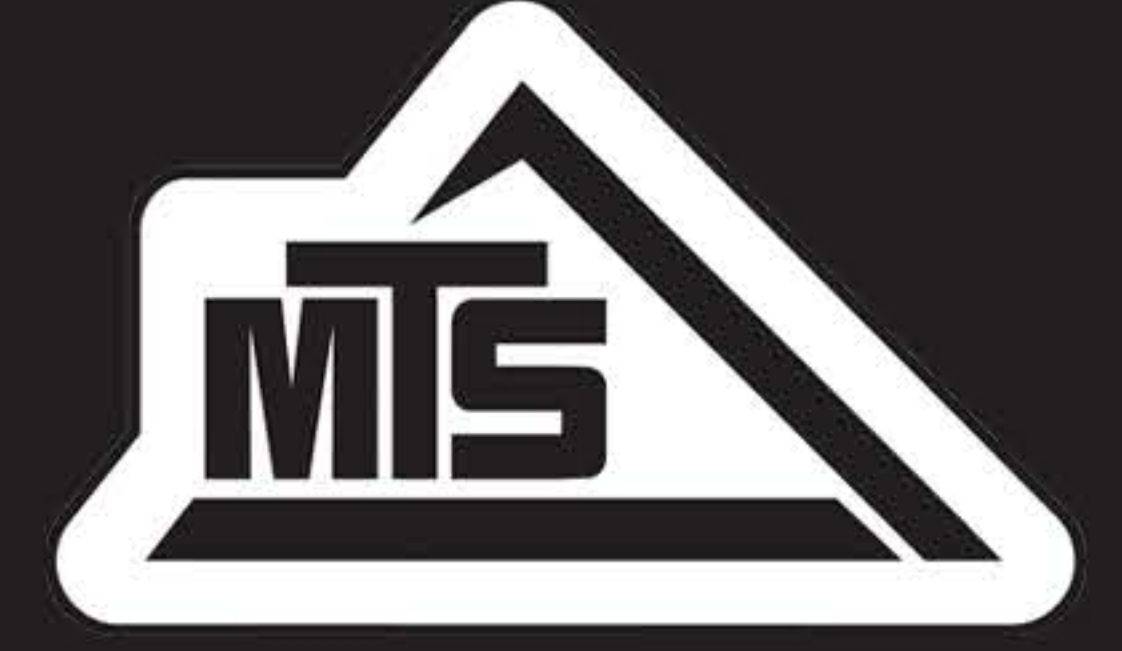

## SCRAPER BOWL

ISO Capacity	35.5 yd <sup>3</sup>	27.14 m <sup>3</sup>
ISO Capacity - Sideracks	39.0 yd <sup>3</sup>	39.82 m <sup>3</sup>
Width of Cut, To Router Bits	157.5 in	4,000 mm
Capacity Struck	21.5 yd <sup>3</sup>	16.44 m <sup>3</sup>
Capacity Struck - Sideracks	24.5 yd <sup>3</sup>	18.73 m <sup>3</sup>
Max Depth of Cut	7.3 in	185 mm
Ground Clearance @ CE	22.8 in	580 mm
Apron Opening	82 in	2,083 mm

## DIMENSIONS

Width (Inside of Bowl)	154 in	3,912 mm
1 Width (Outside Rear Tires)	153 in	3,861 mm
2 Width (Outside Bowl)	166 in	4,216 mm
Height (Floor to top of Ejector)	85 in	2,159 mm
Height (Sidewall)	48 in	1,219 mm
Length (Floor)	70 in	1,778 mm
5 Push Block to Axle	84 in	2,134 mm
6 Axle to Cutting Edge	151 in	3,835 mm
7 Cutting Edge to Hitch	229 in	5,817 mm
Maximum Load Rating	105,000 lbs	47,600 kg

## SHIPPING MODIFICATIONS

3 Height (Overall Shipping)	140 in	3,556 mm
2 Width (Overall Shipping)	169 in	4,293 mm
4 Length (Overall Shipping)	480 in	12,192 mm
Empty Weight	48,000 lbs	21,772 kg

## BRAKES & TIRES

Brake Type	Dry Disk
Caliper Quantity	4
Tire Quantity	4
Standard Tires	29.5R29

## HYDRAULICS

Bowl Cylinder Bore	8 in	203 mm
Bowl Cylinder Stroke	18 in	457 mm
Apron Cylinder Bore	4.5 in	114 mm
Apron Cylinder Stroke	25.1 in	638 mm
Ejector Cylinder Bore	6 in	152 mm
Ejector Cylinder Stroke	71 in	1803 mm

