


MT-12


CONSTRUCTION-GRADE ROLLERBLADE

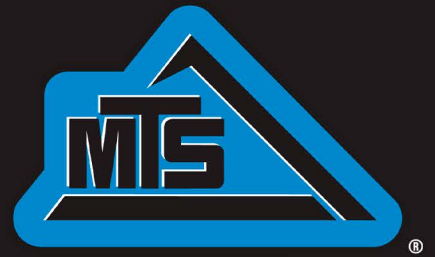

MOBILE TRACK SOLUTIONS

MT-12

SPECIFICATIONS

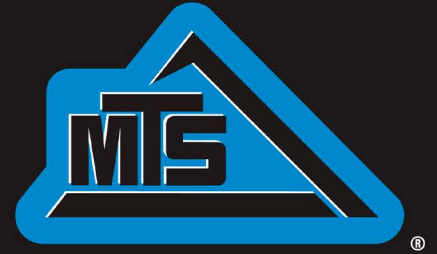

DIMENSIONS

5	Overall Width	144 in	3,658 mm
4	Overall Length	250 in	6,350 mm
6	Overall Height	76 in	1,930 mm
3	Width (Inside of Tires)	89 in	2,261 mm
2	Width (Outside of Tires)	122 in	3,099 mm
	Total Weight	12,450 lbs	5,647 kg
	Recommended Pull Unit	Min 200 hp	Min 112 kw
	Hydraulic Circuits Required	1	
1	Width of Drum	126 in	3,200 mm
	Standard Tires	425 165 R22.5	
	Minimum Hitch Pin Size	1.5 in	38 mm
	Minimum Clevis Opening	4.6 in	117 mm
	Max Operating Pressure	3000 psi	20,684 kPa

TONGUE ASSEMBLY

Category 4 Pintle Hitch with 360° Rotation

Gooseneck Design - Allows clearance for dirt to roll ahead

HYDRAULICS

Pioneer® Quick Couplings, Poppet-style Fittings

Caterpillar® XT-3ES ¾" 4,000 PSI Hydraulic Hose

Two Construction Grade 4,000 PSI Cylinders

Greaseable Spherical Bearings on Rod Ends

ROLLER DRUM ASSEMBLY

Drum ¾" Rolled Steel

Oil Bathed Bearings with Duo-Cone Seals

Drum is 10.5' Wide and 42" in Diameter

End Cap in the Drum for Additional Ballast

ROLLER SCRAPER WELDMENT

Hardox® 450 Steel Box Blade

Standard Cat Cutting Edge (reversible)

Cat Router Bits - used to protect side frame

Greaseless Bushings throughout

